

# R&S®FSVR Real-Time Spectrum Analyzer Specifications



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
<b>All operating modes.....</b>	<b>4</b>
Frequency .....	4
<b>Signal and spectrum analyzer mode.....</b>	<b>5</b>
Sweep time .....	6
Resolution bandwidths.....	6
Level .....	6
Measurement speed .....	12
Trigger functions .....	12
I/Q data .....	12
<b>Real-time spectrum analyzer mode.....</b>	<b>13</b>
Level .....	14
Result display.....	14
I/Q data .....	15
Trigger.....	15
<b>Inputs and outputs.....</b>	<b>16</b>
<b>General data .....</b>	<b>18</b>
<b>Options .....</b>	<b>19</b>
R&S®FSV-B3 audio demodulator.....	19
R&S®FSV-B5 additional interfaces .....	19
R&S®FSV-B21 LO/IF ports for external mixers (for R&S®FSVR30 only).....	20
<b>Ordering information .....</b>	<b>21</b>
Options.....	21
Recommended extras.....	22
Power sensors supported by the R&S®FSV-K9 option .....	23

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

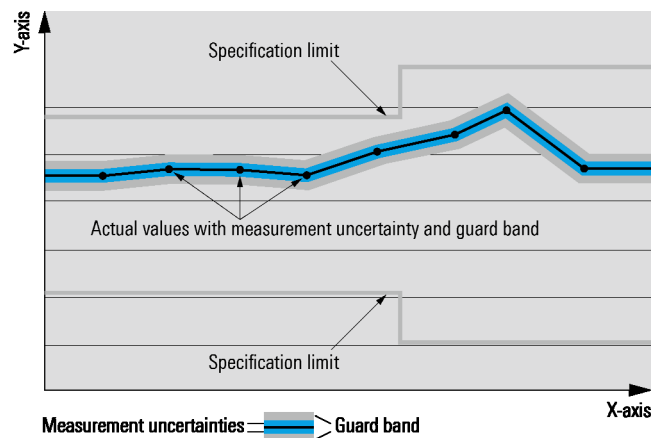

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

Operating modes	
	real-time spectrum analyzer
	signal and spectrum analyzer

## All operating modes

### Frequency


Frequency range	R&S®FSVR7	
	DC-coupled	10 Hz to 7 GHz
	AC-coupled	1 MHz to 7 GHz
	R&S®FSVR13	
	DC-coupled	10 Hz to 13.6 GHz
	AC-coupled	10 MHz to 13.6 GHz
	R&S®FSVR30	
	DC-coupled	10 Hz to 30 GHz
	AC-coupled	10 MHz to 30 GHz
Frequency resolution		0.01 Hz

Reference frequency, internal		
Accuracy		$\pm((\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4 OCXO reference frequency option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +45 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®FSV-B4, OCXO reference frequency option, model .02	$\pm 1 \times 10^{-7}$
	with R&S®FSV-B4, OCXO extended frequency stability option, model .03	$\pm 1 \times 10^{-8}$
Max. initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®FSV-B4 OCXO reference frequency option	$\pm 5 \times 10^{-8}$

## Signal and spectrum analyzer mode

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	691
	range	101 to 32001
Marker tuning frequency step size	marker step size = sweep points	$\text{span}/(\text{sweep points} - 1)$
	marker step size = standard	$\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution	signal and spectrum analyzer mode only	0.001 Hz
Count accuracy	signal and spectrum analyzer mode only	$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1\%$

Spectral purity		
SSB phase noise	frequency = 500 MHz, carrier offset	
	100 Hz	< -84 dBc (1 Hz)
	1 kHz	< -101 dBc (1 Hz)
	10 kHz	< -106 dBc (1 Hz)
	100 kHz	< -115 dBc (1 Hz)
	1 MHz	< -134 dBc (1 Hz)
	10 MHz	< -150 dBc (1 Hz) (nom.)
Residual FM	frequency = 500 MHz, RBW = 1 kHz, sweep time = 100 ms	< 3 Hz (nom.)

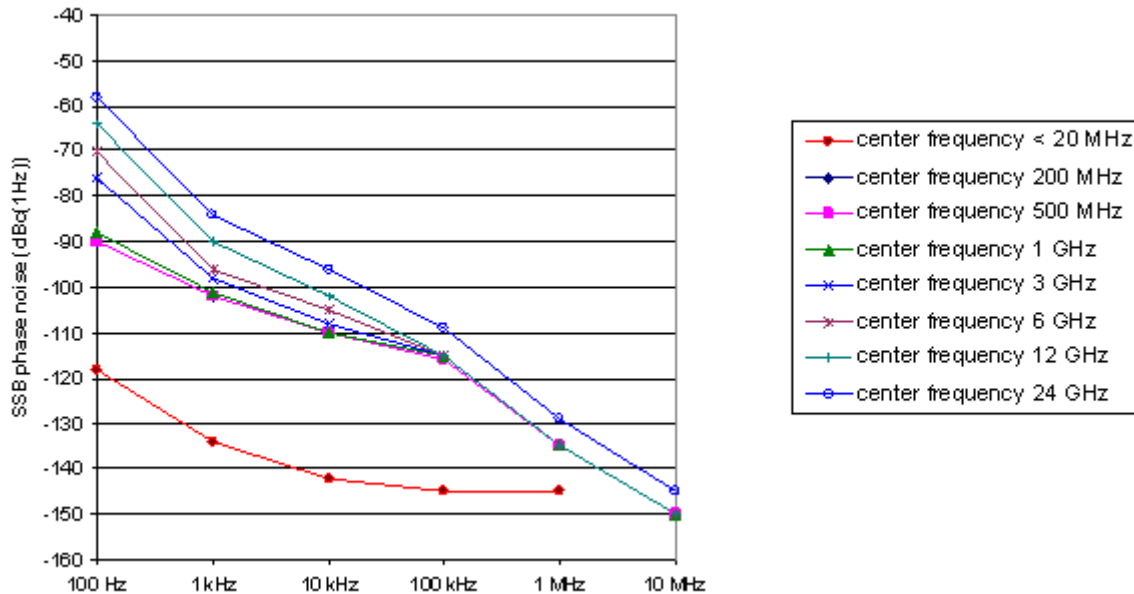

Typical phase noise at different center frequencies.

## Sweep time

Range	span = 0 Hz	1 $\mu$ s to 16000 s
	span $\geq$ 10 Hz, swept	1 ms to 16000 s <sup>1</sup>
	span $\geq$ 10 Hz, FFT	7 $\mu$ s to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz	$\pm 0.1$ % (nom.)
	span $\geq$ 10 Hz, swept	$\pm 3$ % (nom.)

## Resolution bandwidths

<b>Sweep filters and FFT filters</b>		
Resolution bandwidths (-3 dB)	span $\geq$ 10 Hz, sweep filters	1 Hz to 10 MHz in 1/2/3/5 sequence
	span $\geq$ 10 Hz, FFT filters	1 Hz to 300 kHz in 1/2/3/5 sequence
	span = 0 Hz	20 MHz, 28 MHz, 40 MHz <sup>3</sup> additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

<b>Channel filters</b>		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz
		1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz
		1, 1.228, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5, 10, 20, 28, 40 MHz <sup>3</sup>
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

<b>Video bandwidths</b>		1 Hz to 10 MHz in 1/2/3/5 sequence, 20 MHz, 28 MHz, 40 MHz
-------------------------	--	--

<b>Signal analysis bandwidth</b>		40 MHz (nom.) <sup>3</sup>
----------------------------------	--	----------------------------

## Level

Display range		displayed noise floor up to +30 dBm
---------------	--	-------------------------------------

<b>Max. input level</b>		
DC voltage	AC-coupled	50 V
	DC-coupled	0 V
CW RF power	RF attenuation 0 dB	
	RF preamplifier = OFF	20 dBm (= 0.1 W)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = ON	13 dBm (= 0.02 W)
	RF attenuation $\geq$ 10 dB	
	RF preamplifier = OFF	30 dBm (= 1 W)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = ON	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation 0 dB, RF preamplifier = OFF	97 dB $\mu$ V/MHz
Max. pulse voltage	RF attenuation $\geq$ 10 dB	150 V
Max. pulse energy	RF attenuation $\geq$ 10 dB, 10 $\mu$ s	1 mWs

<sup>1</sup> Net sweep time without additional hardware settling time.

<sup>2</sup> Time for data acquisition for FFT calculation.

<sup>3</sup> YIG preselector = OFF with bandwidth = 40 MHz and  $f > 7$  GHz.

<b>Intermodulation</b>		
1 dB compression of input mixer	RF attenuation 0 dB, RF preamplifier = OFF	
	f ≤ 7 GHz	+3 dBm (nom.)
	f > 7 GHz	+5 dBm (nom.)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = ON, RF attenuation 0 dB	
	f ≤ 7 GHz	-12 dBm (nom.)
Third-order intercept point (TOI)	f > 7 GHz	-25 dBm (nom.)
	RF attenuation 0 dB, level 2 × -15 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger, RF preamplifier = OFF	
	10 MHz ≤ f <sub>in</sub> < 100 MHz	> 12 dBm, typ. 15 dBm
	100 MHz ≤ f <sub>in</sub> < 3.6 GHz	> 13 dBm, typ. 16 dBm
	3.6 GHz ≤ f <sub>in</sub> ≤ 30 GHz	> 15 dBm, typ. 18 dBm
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = ON, RF attenuation 0 dB, level 2 × -45 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger	
	10 MHz ≤ f <sub>in</sub> < 100 MHz	-3 dBm (nom.)
	100 MHz ≤ f <sub>in</sub> < 3.6 GHz	-2 dBm (nom.)
	3.6 GHz ≤ f <sub>in</sub> ≤ 7 GHz	0 dBm (nom.)
7 GHz ≤ f <sub>in</sub> ≤ 30 GHz	-10 dBm (nom.)	
Second harmonic intercept (SHI)	RF attenuation 0 dB, level -10 dBm, RF preamplifier = OFF	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	45 dBm (nom.)
	3.5 GHz < f <sub>in</sub> ≤ 15 GHz	
	standard	80 dBm (nom.)
	with R&S®FSV-B24 option	75 dBm (nom.)
	with R&S®FSV-B22 or R&S®FSV-B24 option, RF preamplifier = ON, RF attenuation 0 dB, level -40 dBm	
	100 MHz < f <sub>in</sub> ≤ 3.5 GHz	25 dBm (nom.)
3.5 GHz < f <sub>in</sub> ≤ 15 GHz	25 dBm (nom.)	

<b>Displayed average noise level without preamplifier options</b>		
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker	
	10 Hz	< -90 dBm (nom.)
	20 Hz	< -100 dBm, typ. -110 dBm
	100 Hz	< -110 dBm, typ. -120 dBm
	1 kHz	< -120 dBm, typ. -130 dBm
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	R&S®FSVR7	
	9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm
	100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm
	1 MHz ≤ f < 1 GHz	< -152 dBm, typ. -155 dBm
1 GHz ≤ f < 3.6 GHz	< -150 dBm, typ. -153 dBm	
3.6 GHz ≤ f < 6 GHz	< -148 dBm, typ. -151 dBm	
6 GHz ≤ f ≤ 7 GHz	< -146 dBm, typ. -149 dBm	
R&S®FSVR13, R&S®FSVR30		
9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm	
1 MHz ≤ f < 1 GHz	< -151 dBm, typ. -154 dBm	
1 GHz ≤ f < 3.6 GHz	< -149 dBm, typ. -152 dBm	
3.6 GHz ≤ f < 6 GHz	< -146 dBm, typ. -149 dBm	
6 GHz ≤ f < 7.4 GHz	< -144 dBm, typ. -147 dBm	
7.4 GHz ≤ f < 15 GHz	< -147 dBm, typ. -150 dBm	
15 GHz ≤ f ≤ 30 GHz	< -142 dBm, typ. -145 dBm	

<b>Displayed average noise level with R&amp;S®FSV-B22 preamplifier option</b>	
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = OFF	
10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, typ. -110 dBm
100 Hz	< -110 dBm, typ. -120 dBm
1 kHz	< -120 dBm, typ. -130 dBm
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = OFF	
R&S®FSVR7	
9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm
1 MHz ≤ f < 1 GHz	< -152 dBm, typ. -155 dBm
1 GHz ≤ f < 3.6 GHz	< -150 dBm, typ. -153 dBm
3.6 GHz ≤ f < 6 GHz	< -148 dBm, typ. -151 dBm
6 GHz ≤ f ≤ 7 GHz	< -146 dBm, typ. -149 dBm
R&S®FSVR13, R&S®FSVR30	
9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm
1 MHz ≤ f < 1 GHz	< -151 dBm, typ. -154 dBm
1 GHz ≤ f < 3.6 GHz	< -149 dBm, typ. -152 dBm
3.6 GHz ≤ f < 6 GHz	< -146 dBm, typ. -149 dBm
6 GHz ≤ f < 7.4 GHz	< -144 dBm, typ. -147 dBm
7.4 GHz ≤ f < 15 GHz	< -147 dBm, typ. -150 dBm
15 GHz ≤ f ≤ 30 GHz	< -142 dBm, typ. -145 dBm
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = ON	
R&S®FSVR7	
100 kHz ≤ f < 1 MHz	< -150 dBm, typ. -155 dBm
1 MHz ≤ f < 1 GHz	< -162 dBm, typ. -165 dBm
1 GHz ≤ f < 3.6 GHz	< -160 dBm, typ. -163 dBm
3.6 GHz ≤ f < 6 GHz	< -158 dBm, typ. -161 dBm
6 GHz ≤ f ≤ 7 GHz	< -156 dBm, typ. -159 dBm
R&S®FSVR13, R&S®FSVR30	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -148 dBm
1 MHz ≤ f < 20 MHz	< -155 dBm, typ. -158 dBm
20 MHz ≤ f < 1 GHz	< -160 dBm, typ. -163 dBm
1 GHz ≤ f < 3.6 GHz	< -159 dBm, typ. -162 dBm
3.6 GHz ≤ f < 6 GHz	< -156 dBm, typ. -159 dBm
6 GHz ≤ f ≤ 7 GHz	< -154 dBm, typ. -157 dBm



**Displayed average noise level with R&S®FSV-B24 preamplifier option**

0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 5 Hz, VBW = 5 Hz, zero span, sweep time 500 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = OFF	
10 Hz	< -90 dBm (nom.)
20 Hz	< -100 dBm, typ. -110 dBm
100 Hz	< -110 dBm, typ. -120 dBm
1 kHz	< -120 dBm, typ. -130 dBm
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = OFF	
R&S®FSVR13, R&S®FSVR30	
9 kHz ≤ f < 100 kHz	< -130 dBm, typ. -140 dBm
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -150 dBm
1 MHz ≤ f < 1 GHz	< -150 dBm, typ. -153 dBm
1 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 6 GHz	< -144 dBm, typ. -147 dBm
6 GHz ≤ f < 7.4 GHz	< -141 dBm, typ. -144 dBm
7.4 GHz ≤ f < 13.6 GHz	< -144 dBm, typ. -147 dBm
13.6 GHz ≤ f < 15 GHz	< -142 dBm, typ. -145 dBm
15 GHz ≤ f ≤ 30 GHz	< -139 dBm, typ. -142 dBm
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = ON, YIG preselector = ON	
R&S®FSVR13, R&S®FSVR30	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -148 dBm
1 MHz ≤ f < 20 MHz	< -155 dBm, typ. -158 dBm
20 MHz ≤ f < 1 GHz	< -160 dBm, typ. -163 dBm
1 GHz ≤ f < 3.6 GHz	< -157 dBm, typ. -160 dBm
3.6 GHz ≤ f < 6 GHz	< -153 dBm, typ. -156 dBm
6 GHz ≤ f ≤ 7.4 GHz	< -150 dBm, typ. -153 dBm
7.4 GHz ≤ f < 15 GHz	< -164 dBm, typ. -167 dBm
15 GHz ≤ f < 30 GHz	< -159 dBm, typ. -162 dBm
0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker, RF preamplifier = ON, YIG preselector = OFF	
R&S®FSVR13, R&S®FSVR30	
100 kHz ≤ f < 1 MHz	< -145 dBm, typ. -148 dBm
1 MHz ≤ f < 20 MHz	< -155 dBm, typ. -158 dBm
20 MHz ≤ f < 1 GHz	< -160 dBm, typ. -163 dBm
1 GHz ≤ f < 3.6 GHz	< -157 dBm, typ. -160 dBm
3.6 GHz ≤ f < 6 GHz	< -153 dBm, typ. -156 dBm
6 GHz ≤ f < 7 GHz	< -150 dBm, typ. -153 dBm
7 GHz ≤ f < 7.4 GHz	< -146 dBm, typ. -149 dBm
7.4 GHz ≤ f < 15 GHz	< -160 dBm, typ. -163 dBm
15 GHz ≤ f < 30 GHz	< -155 dBm, typ. -158 dBm

<b>Spurious responses</b>		
YIG preselector = ON for $f \geq 7$ GHz		
Image response	20 MHz $\leq f \leq 7$ GHz	
	$f_{in} - 2 \times 8409.9$ MHz (1st IF)	< -80 dBc (nom.)
	$f_{in} - 2 \times 729.9$ MHz (2nd IF)	< -80 dBc
	$f_{in} - 2 \times 89.9$ MHz (3rd IF)	< -80 dBc
	7 GHz $< f < 30$ GHz	
	$f_{in} \pm 2 \times 729.9$ MHz (1st IF)	< -80 dBc
Intermediate frequency response	20 MHz $\leq f \leq 7$ GHz	
	1st IF (8409.9 MHz)	< -70 dBc (nom.)
	2nd IF (729.9 MHz)	< -80 dBc
	3rd IF (89.9 MHz)	< -80 dBc
	7 GHz $< f \leq 30$ GHz	
	1st IF (729.9 MHz)	< -80 dBc
Residual spurious response	0 dB RF attenuation	
	$f \leq 1$ MHz	< -90 dBm
	$f > 1$ MHz	< -103 dBm
Local oscillator related spurious	$f < 15$ GHz	
	1 kHz $\leq$ offset from carrier $\leq 10$ MHz	< -70 dBc
	offset from carrier $> 10$ MHz	< -80 dBc
	15 GHz $\leq f < 30$ GHz	
	1 kHz $\leq$ offset from carrier $\leq 10$ MHz	< -64 dBc
	offset from carrier $> 10$ MHz	< -74 dBc
Other interfering signals		
Subharmonic of 1st LO	20 MHz $\leq f < 7$ GHz, spurious at 8410 MHz $- 2 \times f_{in}$	< -70 dBc
Harmonic of 1st LO	mixer level $< -25$ dBm, spurious at $f_{in} - 4205$ MHz	< -70 dBc

<b>Level display</b>		
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		Max Peak, Min Peak, Auto Peak (Normal), Sample, RMS, Average
Trace functions		Clear/Write, Max Hold, Min Hold, Average, View
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Spectrogram display</b>		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100000 frames <sup>4</sup>
Recording mode	frame count $\leq$ history depth	single trace, continuous, frame count
Trace detector		Max Peak, Min Peak, Sample, RMS, Average
Number of markers		16
Marker readout		frequency, time/frame number, level

<sup>4</sup> A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count. For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level –10 dBm, reference level –10 dBm, RF attenuation 10 dB	
	+20 °C to +30 °C	< 0.2 dB ( $\sigma = 0.07$ dB)
	+5 °C to +40 °C	< 0.35 dB ( $\sigma = 0.12$ dB)
Frequency response referenced to 64 MHz	DC coupling, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = OFF, +20 °C to +30 °C	
	9 kHz $\leq$ f < 10 MHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	10 MHz $\leq$ f < 3.6 GHz	< 0.3 dB ( $\sigma = 0.1$ dB)
	3.6 GHz $\leq$ f < 7 GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	7 GHz $\leq$ f < 13.6 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	13.6 GHz $\leq$ f < 30 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.66$ dB)
	any setting of RF attenuation, RF preamplifier = OFF, +5 °C to +40 °C	
	9 kHz $\leq$ f < 3.6 GHz	< 1 dB ( $\sigma = 0.33$ dB)
	3.6 GHz $\leq$ f < 7 GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	7 GHz $\leq$ f < 13.6 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	13.6 GHz $\leq$ f < 26.5 GHz	< 3 dB ( $\sigma = 1$ dB)
	26.5 GHz $\leq$ f < 30 GHz	< 3.5 dB ( $\sigma = 1.17$ dB)
	any setting of RF attenuation, RF preamplifier = ON, +5 °C to +40 °C	
	9 kHz $\leq$ f < 3.6 GHz	< 1 dB ( $\sigma = 0.33$ dB)
	3.6 GHz $\leq$ f < 7 GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	7 GHz $\leq$ f < 13.6 GHz	< 3 dB ( $\sigma = 1$ dB)
	13.6 GHz $\leq$ f < 30 GHz	< 3.5 dB ( $\sigma = 1.17$ dB)
DC coupling, RF preamplifier = OFF, +5 °C to +40 °C		
10 Hz $\leq$ f < 20 Hz	< 1.5 dB (nom.)	
20 Hz $\leq$ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)	
Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting		0 dB <sup>5</sup> (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	
	sweep filters	< 0.1 dB ( $\sigma = 0.04$ dB)
	FFT filters	< 0.2 dB ( $\sigma = 0.07$ dB)

<b>Display nonlinearity</b>		
Logarithmic level display	S/N > 16 dB	
	0 dB to –50 dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	–50 dB to –60 dB	< 0.15 dB ( $\sigma = 0.05$ dB)
	–60 dB to –70 dB	< 0.2 dB ( $\sigma = 0.07$ dB)
Linear level display	S/N > 16 dB, 0 dB to –70 dB	< 5 % of reference level (nom.)

<b>Total measurement uncertainty</b>		
	signal level 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time auto, sweep type = sweep, RF attenuation 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = OFF, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz $\leq$ f < 10 MHz	$\pm 0.40$ dB
	10 MHz $\leq$ f < 3.6 GHz	$\pm 0.31$ dB
	3.6 GHz $\leq$ f < 7 GHz	$\pm 0.40$ dB
	7 GHz $\leq$ f < 13.6 GHz	$\pm 1.01$ dB
	13.6 GHz $\leq$ f < 30 GHz	$\pm 1.33$ dB

<sup>5</sup> The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

## Measurement speed

Local measurement and display update rate		1.1 ms (900/s) (meas.)
Remote measurement, 1000 sweep averages <sup>6</sup>		1 ms (1000/s) (meas.)
Remote measurement and LAN transfer <sup>6</sup>		3 ms (333/s) (meas.)
Marker peak search		1.5 ms (meas.)
Center frequency tune and transfer <sup>6</sup>	$f \leq 7$ GHz	15 ms (meas.)
	$f > 7$ GHz	28 ms (meas.)

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external, IF power
Trigger offset	span $\geq 10$ Hz	31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of offset)
	span = 0 Hz	(–sweep time) to 30 s, min. resolution 31.25 ns (or 1 % of offset)
Max. deviation of trigger offset		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{trigger offset}))$
<b>IF power trigger</b>		
Sensitivity	min. signal power	–60 dBm + RF attenuation – RF pre-amplifier gain (nom.)
	max. signal power	–10 dBm + RF attenuation – RF pre-amplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz, swept	40 MHz (nom.)
	RBW > 20 kHz, FFT	
	RBW $\leq 500$ kHz, swept	6 MHz (nom.)
	RBW $\leq 20$ kHz, FFT	
<b>Gated sweep</b>		
Gate source		video, external, IF power
Gate delay		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of delay)
Gate length		31.25 ns to 30 s, min. resolution 31.25 ns (or 1 % of gate length)
Max. deviation of gate length		$\pm(7.8125 \text{ ns} + (0.1 \% \times \text{gate length}))$

## I/Q data

Interface		GPIO or LAN interface
Memory length		max. 200 Msample I and Q
Word length of I/Q samples	sampling rate > 64 MHz or number of samples > 100 Msample	18 bit
	otherwise	24 bit
Sampling rate		100 Hz to 128 MHz
Max. signal bandwidth (equalized)	$f \leq 7$ GHz	40 MHz
	$f > 7$ GHz, YIG preselector = OFF	40 MHz
Amplitude flatness	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} \leq 7$ GHz	$\pm 0.3$ dB (nom.)
	$f > 7$ GHz, YIG preselector = OFF	$\pm 0.5$ dB (nom.)
Deviation from linear phase	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} \leq 7$ GHz	$\pm 1^\circ$ (nom.)
	$f > 7$ GHz, YIG preselector = OFF	$\pm 2^\circ$ (nom.)

<sup>6</sup> Measured with personal computer equipped with Intel Core2 Duo 2.13 GHz and Gbit LAN interface.

## Real-time spectrum analyzer mode

The specifications of the real-time spectrum analyzer mode are based on the specifications of the signal and spectrum analyzer mode. Therefore these specifications apply also for the real-time spectrum analyzer mode unless otherwise noted. For frequencies > 7 GHz, the specifications for YIG preselector = OFF apply.

<b>Span</b>		
Range		100 Hz to 40 MHz
Resolution		1 Hz

<b>Frequency readout</b>		
Number of sweep (trace) points		801
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Marker tuning frequency step size		$\text{span}/(\text{sweep points} - 1)$

<b>Sweep time</b>		
Range	real-time spectrum, spectrogram	$52 \mu\text{s}$ to $1 \text{ s}^7$
Resolution		$4 \mu\text{s}$

<b>Data acquisition</b>		
A/D converter		
Sampling rate		128 Msample/s
Resolution		16 bit
FFT length		1024
FFT window		Blackman Harris, Flattop, Gaussian, Rectangular, Hanning, Kaiser
FFT overlap factor		$\geq 80 \%$
Spectrum (FFT) processing rate	span = 40 MHz	250000/s
Minimum detectable signal duration	span = 40 MHz, SNR > 60 dB	25 ns (nom.)

<b>Resolution bandwidth (-3 dB)</b>		
Range		1 Hz to 400 kHz, fixed span/RBW ratio, dependent on selected FFT window
Span/RBW ratio	selected FFT window	
	Blackman Harris (default)	200
	Flattop	100
	Gaussian	200
	Rectangular	400
	Hanning	250
	Kaiser	200
Bandwidth uncertainty		< 3 % (nom.)

<b>Video bandwidths</b>		none
-------------------------	--	------

<b>Channel bandwidths</b>		none
---------------------------	--	------

<sup>7</sup> Time period during which individual FFTs contribute to the results of the selected trace detector.

## Level

<b>Amplitude flatness</b>	$(1.25 \times \text{signal analysis bandwidth}) \leq f_{\text{center}} \leq 7 \text{ GHz}$	$\pm 0.8 \text{ dB (nom.)}$
	$f > 7 \text{ GHz}$	$\pm 1 \text{ dB (nom.)}$

<b>Spurious free dynamic range</b>	span = 40 MHz	$< -70 \text{ dBc (nom.)}$
------------------------------------	---------------	----------------------------

<b>Minimum signal duration necessary for specified level measurement uncertainty<sup>8</sup></b>	trace detector = Max Peak, span =	nominal values
		40 MHz
	20 MHz	45 $\mu\text{s}$
	10 MHz	86 $\mu\text{s}$
	5 MHz	168 $\mu\text{s}$
	2 MHz	414 $\mu\text{s}$
	1 MHz	824 $\mu\text{s}$
	500 kHz	1.7 ms
	200 kHz	4.1 ms
	100 kHz	8.2 ms
	50 kHz	16.4 ms
	20 kHz	41 ms
	10 kHz	82 ms
	5 kHz	164 ms
	2 kHz	410 ms
	1 kHz	820 ms
	500 Hz	1.64 s
	200 Hz	4.1 s
	100 Hz	8.2 s

## Result display

Display modes		full screen, split screen
Max. number of screens	display mode = split screen	4
Result display types	with or without active frequency mask trigger + any combination if display mode = split screen	real-time spectrum, persistence spectrum, spectrogram

<b>Real-time spectrum</b>		
Number of traces		4
Trace detector		Max Peak, Min Peak, Sample, Average
Trace functions		Clear/Write, Max Hold, Min Hold, Average, View
Number of markers		16
Marker readout		frequency, level
Maximum sweep update rate <sup>9</sup>		10000/s

<b>Persistence spectrum</b>		
Persistence bitmap resolution		801 $\times$ 600 points
Persistence bitmap color depth		256 colors
Probability range covered by bitmap colors		selectable, 0 % to 100 %
Persistence duration		0 s to 8 s
Persistence max hold transparency	overlying display of the maximum level values reached	0 % to 100 % in 1 % steps
Number of markers		16
Marker readout		frequency, level, hit probability
Number of real-time traces	in addition to persistence spectrum display	1
Real-time trace detector		Max Peak, Min Peak, Sample, Average
Real-time trace functions		Clear/Write, Max Hold, Min Hold, Average, View

<sup>8</sup> Events lasting shorter than the minimum event duration specification will result in degraded level accuracy.

<sup>9</sup> Sweep update rate includes FFT overlap and trace detector processing.

<b>Spectrogram</b>		
Result display		color-graded bitmap
Spectrogram bitmap color depth		240 colors
Dynamic range covered by bitmap colors		selectable, up to 200 dB (nom.)
History depth		max. 100000 frames <sup>10</sup>
Recording mode	frame count ≤ history depth	single trace, continuous, frame count
Trace detector		Max Peak, Min Peak, Sample, Average
Number of markers		16
Marker readout		frequency, time/frame number, level
Maximum sweep update rate <sup>11</sup>		10000/s

## I/Q data

Not yet available in real-time spectrum analyzer mode.

## Trigger

<b>Trigger source</b>		free run, frequency mask, external
-----------------------	--	------------------------------------

<b>Frequency mask trigger</b>		
Trigger level resolution		0.5 dB
Minimum necessary mask distance to noise floor		30 dB (nom.)
Dynamic range	frequency mask – reference level	0 dB to –80 dB (nom.)
Trigger level accuracy	frequency mask > reference level – 50 dB	±(frequency response + 1.0 dB) (nom.)
	frequency mask > reference level – 70 dB	±(frequency response + 2.5 dB) (nom.)
Trigger uncertainty	span = 40 MHz	±12 μs (nom.)
Trigger conditions		enter mask area, leave mask area
Trigger modes		stop on trigger
<b>Trigger mask</b>		
Mask length		3 to 801 frequency points
Mask frequency resolution		span/800
Mask shape generation		manual, auto set (mask derived from the measured spectrum)
Minimum signal duration for 100 % probability of trigger (nominal values) <sup>12</sup>		see minimum signal duration necessary for specified level measurement uncertainty

<b>Trigger out</b>	with option R&S®FSV-B5	
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

<sup>10</sup> A frame is the measurement result displayed in one row of the spectrogram. It may consist of one or more traces, depending on the set sweep count. For example, a sweep count of 2 means that two traces will be combined to one row in the spectrogram using the set trace detector.

<sup>11</sup> Sweep update rate includes FFT overlap and trace detector processing.

<sup>12</sup> Events lasting shorter than the minimum event duration specification will result in degraded frequency mask trigger accuracy.

## Inputs and outputs

<b>RF input</b>		
Impedance		50 Ω
Connector	R&S®FSVR7, R&S®FSVR13 R&S®FSVR30	N female test port adapter APC 3.5 mm/N female
VSWR	RF attenuation ≥ 10 dB	
	10 MHz ≤ f < 3.6 GHz	< 1.5, typ. 1.3
	3.6 GHz ≤ f < 20 GHz	< 2, typ. 1.8
	20 GHz ≤ f < 27 GHz	< 2.2, typ. 2
	27 GHz ≤ f ≤ 30 GHz	
	DC-coupled	< 2.2, typ. 2
	AC-coupled	2.5 (meas.)
	RF attenuation < 10 dB, DC-coupled	
10 MHz ≤ f < 7 GHz	2 (meas.)	
7 GHz ≤ f ≤ 30 GHz	2.5 (meas.)	
Setting range of attenuator	standard	0 dB to 75 dB, in 5 dB steps
	with R&S®FSV-B25 option	0 dB to 75 dB, in 1 dB steps
Setting range of electronic attenuator	with R&S®FSV-B25 option, f ≤ 7 GHz	0 dB to 25 dB, in 1 dB steps
	with R&S®FSV-B25 option, f > 7 GHz	0 dB to 9 dB, in 1 dB steps
RF preamplifier gain	with R&S®FSV-B22 option	20 dB (nom.)
	with R&S®FSV-B24 option	
	f ≤ 7 GHz	20 dB (nom.)
	f > 7 GHz	30 dB (nom.)

<b>Probe power supply</b>		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

<b>Noise source drive</b>		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

<b>Power sensor</b>		
Connector		6-pin LEMOSA female for supported R&S®NRP-Zxx power sensors

<b>USB interface</b>		
		2 ports, type A plug, version 2.0

<b>Reference output</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	10 MHz
	external reference	same as reference input signal
Level		> 0 dBm (nom.)

<b>Reference input</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f <sub>in</sub> ≤ 20 MHz, in 100 kHz steps
Required level		> 0 dBm into 50 Ω (nom.)

<b>External trigger/gate input</b>		
Connector		BNC female
Trigger voltage		0.5 V to 3.5 V (nom.)
Input impedance		10 kΩ (nom.)



<b>IEC/IEEE bus control</b>		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		10/100/1000BaseT
Connector		RJ-45

<b>External monitor</b>		
Connector		VGA-compatible, 15-pin, mini D-Sub

## General data

<b>Display</b>		21 cm LC TFT color display (8.4")
Resolution		800 × 600 pixel (SVGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

<b>Data storage</b>		
Internal		hard disk $\geq$ 40 Gbyte (nom.)
External		supports USB-2.0-compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +40 °C
	permissible temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 130 Hz, acceleration 1.2 g (rms), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-T-28800F, class 3, MIL-STD 810E, method 516.4, procedure I

<b>EMC</b>		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>13, 14</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>12</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--	--

<b>Recommended calibration interval</b>		1 year
---	--	--------

<b>Power supply</b>		
AC input voltage range		100 V to 240 V, $\pm 10$ % (nom.)
AC supply frequency		50 Hz to 400 Hz, +10 %/-6% (nom.)
Max. input current		5.2 A (100 V) to 2.2 A (240 V) (nom.)
Power consumption	R&S®FSVR7	150 W, max. 250 W with all options (meas.)
	R&S®FSVR13, R&S®FSVR30	175 W, max. 250 W with all options (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1
Test mark		VDE-GS, cCSA <sub>US</sub>

<b>Weight and dimensions</b>		
Dimensions (nom.)	W × H × D	412 mm × 197 mm × 517 mm 16.22 in × 7.76 in × 20.35 in
Net weight without options (nom.)	R&S®FSVR7	12.8 kg 28.22 lb
	R&S®FSVR13	13.6 kg 29.98 lb
	R&S®FSVR30	14.0 kg 30.86 lb

<sup>13</sup> Emission limits for class A equipment.

<sup>14</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

## Options

### R&S® FSV-B3 audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

<b>AF output</b>		
Connector		3.5 mm mini jack
Output impedance		10 $\Omega$ (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

### R&S® FSV-B5 additional interfaces

<b>User port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IF/video/demod out</b>		
Connector		BNC female, 50 $\Omega$ (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		32 MHz (nom.)
Output level (gain versus RF input)	RF attenuation 0 dB, RF preamplifier OFF, span 0 Hz	0 dB (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale	logarithmic
	lin. display scale	linear
Output level	center frequency > 10 MHz, span 0 Hz, signal at reference level and center frequency	1 V, open circuit (nom.)

<b>Trigger out</b>		
Connector		BNC female
Output		TTL-compatible, 0 V/5 V (nom.)

<b>USB interface</b>		2 ports, type A plug, version 2.0
----------------------	--	-----------------------------------

## R&S® FSV-B21 LO/IF ports for external mixers (for R&S® FSVR30 only)

LO signal		
Frequency range		7.73 GHz to 15.23 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency		729.9 MHz
Full-scale level	2-port mixer (LO output/IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level -30 dBm, RBW 30 kHz, 3-port mixer, IF input (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## Ordering information

Designation	Type	Order No.
Real-Time Spectrum Analyzer	R&S®FSVR7	1311.0006.07
Real-Time Spectrum Analyzer	R&S®FSVR13	1311.0006.13
Real-Time Spectrum Analyzer	R&S®FSVR30	1311.0006.30
<b>Accessories supplied</b>		
Power cable, quick start guide and CD-ROM (with operating manual and service manual)		
R&S®FSVR30: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connectors		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
Audio Demodulator	R&S®FSV-B3	1310.9516.02	yes	retrofit in service center
OCXO Reference Frequency	R&S®FSV-B4	1310.9522.02	yes	user-retrofittable
OCXO Extended Frequency Stability	R&S®FSV-B4	1310.9522.03	yes	user-retrofittable
Additional Interfaces	R&S®FSV-B5	1310.9539.02	yes	IF out, video out, AUX port, trigger out, 2 × USB
Spare Hard Drive (removable hard drive)	R&S®FSVR-B19	1310.9574.04	yes	user-retrofittable
LO/IF Ports for External Mixers	R&S®FSV-B21	1310.9597.02	no	R&S®FSVR30 only
RF Preamp (9 kHz to 7 GHz)	R&S®FSV-B22	1310.9600.02	yes	user-retrofittable
RF Preamp (9 kHz to 13.6 GHz)	R&S®FSV-B24	1310.9616.13	no	
RF Preamp (9 kHz to 30 GHz)	R&S®FSV-B24	1310.9616.30	no	
Electronic Attenuator, 1 dB steps	R&S®FSV-B25	1310.9622.02	yes	user-retrofittable
<b>Firmware/software</b>				
FM Stereo Measurements	R&S®FSV-K7S	1310.8126.02		
Bluetooth®/EDR Measurements	R&S®FSV-K8	1310.8155.02		
Power Sensor Measurement with R&S®NRP Power Sensors	R&S®FSV-K9	1310.8203.02		supports R&S®NRP-Zxx power sensors
Analysis of GSM, EDGE and EDGE Evolution Signals	R&S®FSV-K10	1310.8055.02		
Noise Figure and Gain Measurements	R&S®FSV-K30	1310.8355.02		
Phase Noise Measurement Application	R&S®FSV-K40	1310.8403.02		
Vector Signal Analysis	R&S®FSV-K70	1310.8455.02		
Analysis of 3GPP FDD Base Station Signals incl. HSPA+	R&S®FSV-K72	1310.8503.02		
3GPP FDD UE Analysis incl. HSPA+	R&S®FSV-K73	1310.8555.02		
3GPP TD-SCDMA BTS Measurements	R&S®FSV-K76	1310.8603.02		
TD-SCDMA UE Measurements	R&S®FSV-K77	1310.8655.02		
Analysis of CDMA2000® Base Station Signals	R&S®FSV-K82	1310.8703.02		
Analysis of 1xEV-DO Base Station Signals	R&S®FSV-K84	1310.8803.02		
Analysis of WLAN 802.11a, b, g, j Signals	R&S®FSV-K91	1310.8903.02		
Extension of R&S®FSV-K91 to 802.11n	R&S®FSV-K91n	1310.9468.02		
Analysis of WiMAX™ 802.16 SISO Signals	R&S®FSV-K93	1310.8955.02		
Analysis of EUTRA/LTE FDD Downlink Signals	R&S®FSV-K100	1310.9051.02		
Analysis of EUTRA/LTE FDD Uplink Signals	R&S®FSV-K101	1310.9100.02		
EUTRA/LTE Downlink MIMO Measurements	R&S®FSV-K102	1310.9151.02		
Analysis of EUTRA/LTE TDD Downlink Signals	R&S®FSV-K104	1309.9774.02		
Analysis of EUTRA/LTE TDD Uplink Signals	R&S®FSV-K105	1309.9780.02		

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter (not for R&S®FSV-B1)	R&S®ZZA-478	1096.3248.00
Soft Carrying Case (gray)	R&S®ZZT-473	1109.5048.00
<b>Matching pads, 50/75 Ω</b>		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>SWR bridges, 50 Ω</b>		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>Connectors and cables</b>		
Probe Power Connector, 3-pin		1065.9480.00
<b>DC blocks</b>		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
<b>For R&amp;S®FSVR30 only</b>		
Test Port Adapter, N male		1021.0541.00
Test Port Adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set (N male and 3.5 mm male)	R&S®FSE-Z15	1046.2002.02

## Power sensors supported by the R&S®FSV-K9 option <sup>15</sup>

Designation	Type	Order No.
Universal Power Sensor 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Power Sensor Module with Power Splitter DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
Power Sensor Module with Power Splitter DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
Thermal Power Sensor 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Wideband Power Sensor 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Average Power Sensor 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA -USA).

“WiMAX Forum” is a registered trademark of the WiMAX Forum. “WiMAX,” the WiMAX Forum logo, “WiMAX Forum Certified,” and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

For product brochure, see PD 5214.3381.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

<sup>15</sup> For average power measurement only.

## Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System  
**ISO 9001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East  
+49 89 4129 137 74  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America  
1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America  
+1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia/Pacific  
+65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners | Printed in Germany (ft)

PD 5214.3381.22 | Version 01.01 | June 2010 | R&S®FSVR

Subject to change

© 2010 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany